


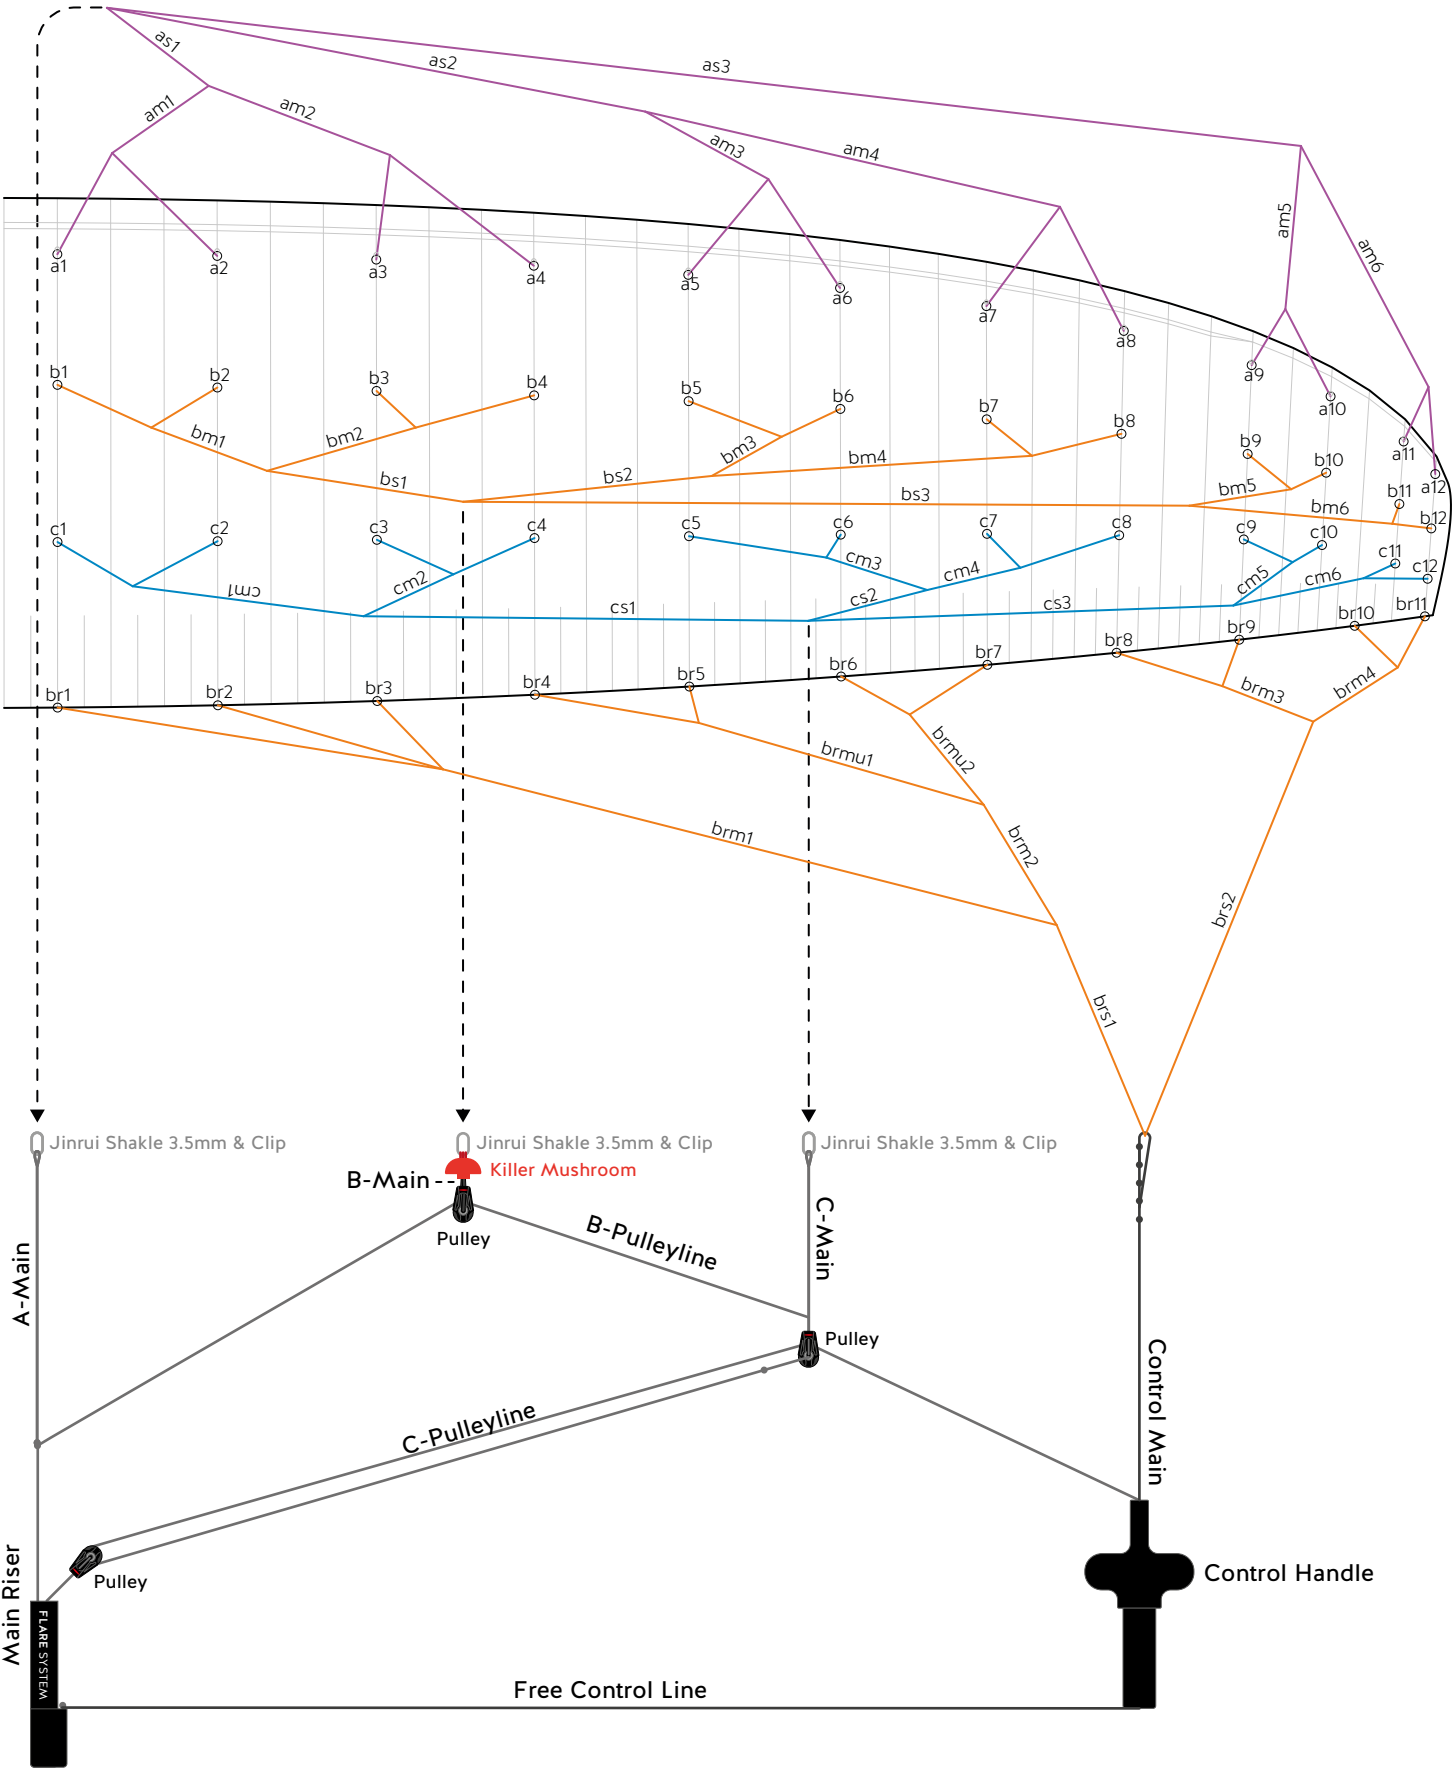

NAME	LENGTH (MM)	MATERIAL	COLOUR	COMMENT
a1	967	8001U-90	Magenta	
a2	855	8001U-90	Magenta	
a3	927	8001U-90	Magenta	
a4	909	8001U-90	Magenta	
a5	1046	8001U-70	Magenta	
a6	920	8001U-70	Magenta	
a7	1049	8001U-70	Magenta	
a8	1030	8001U-70	Magenta	
a9	670	8001U-50	Magenta	
a10	631	8001U-50	Magenta	
a11	169	8001U-50	Magenta	
a12	204	8001U-50	Magenta	
am1	945	8001U-190	Magenta	Double Splice both sides
am2	805	8001U-190	Magenta	Double Splice both sides
am3	700	8001U-190	Magenta	Double Splice both sides; Black marking on Top side
am4	490	8001U-130	Magenta	Double Splice both sides
am5	685	8001U-70	Magenta	Double Splice both sides
am6	1135	8001U-50	Magenta	Double Splice both sides
as1	2155	8001U-340	Magenta	Double Splice Top side; Loop cover bottom side
as2	2025	8001U-340	Magenta	Double Splice Top side; Loop cover bottom side
as3	2050	8001U-130	Magenta	Double Splice Top side; Loop cover bottom side
b1	937	8001U-70	Orange	
b2	826	8001U-70	Orange	
b3	899	8001U-70	Orange	
b4	884	8001U-70	Orange	
b5	1022	8001U-70	Orange	
b6	901	8001U-70	Orange	
b7	1037	8001U-50	Orange	
b8	1025	8001U-50	Orange	
b9	679	8001U-50	Orange	
b10	651	8001U-50	Orange	
b11	193	8001U-50	Orange	
b12	219	8001U-50	Orange	
bm1	945	8001U-130	Orange	Double Splice both sides
bm2	805	8001U-130	Orange	Double Splice both sides
bm3	700	8001U-130	Orange	Double Splice both sides
bm4	490	8001U-90	Orange	Double Splice both sides
bm5	685	8001U-50	Orange	Double Splice both sides
bm6	1135	8001U-50	Orange	Double Splice both sides
bs1	2155	8001U-230	Orange	Double Splice Top side; Loop cover bottom side; Double-loop on shakle
bs2	2025	8001U-190	Orange	Double Splice Top side; Loop cover bottom side; Double-loop on shakle
bs3	2050	8001U-90	Orange	Double Splice Top side; Loop cover bottom side; Double-loop on shakle

NAME	LENGTH (MM)	MATERIAL	COLOUR	COMMENT
c1	998	8001U-70	Blue	
c2	885	8001U-70	Blue	
c3	955	8001U-70	Blue	
c4	935	8001U-70	Blue	
c5	1070	8001U-50	Blue	
c6	947	8001U-50	Blue	
c7	1079	8001U-50	Blue	
c8	1063	8001U-50	Blue	
c9	717	8001U-50	Blue	
c10	685	8001U-50	Blue	
c11	222	8001U-50	Blue	
c12	236	8001U-50	Blue	
cm1	945	8001U-90	Blue	Double Splice both sides
cm2	805	8001U-90	Blue	Double Splice both sides
cm3	700	8001U-70	Blue	Double Splice both sides
cm4	490	8001U-70	Blue	Double Splice both sides
cm5	685	8001U-50	Blue	Double Splice both sides
cm6	1135	8001U-50	Blue	Double Splice both sides
cs1	2155	8001U-190	Blue	Double Splice Top side; Loop cover bottom side
cs2	2025	8001U-130	Blue	Double Splice Top side; Loop cover bottom side
cs3	2050	8001U-70	Blue	Double Splice Top side; Loop cover bottom side
br1	1648	8001U-50	Orange	
br2	1505	8001U-50	Orange	
br3	1429	8001U-50	Orange	
br4	823	8001U-50	Orange	
br5	699	8001U-50	Orange	
br6	766	8001U-50	Orange	
br7	734	8001U-50	Orange	
br8	605	8001U-50	Orange	
br9	506	8001U-50	Orange	
br10	421	8001U-50	Orange	
br11	455	8001U-50	Orange	
brmu1	1226	8001U-70	Orange	Double Splice both sides
brmu2	1073	8001U-70	Orange	Double Splice both sides
brm1	1860	8001U-70	Orange	Double Splice both sides; Black marking on Top side
brm2	1151	8001U-90	Orange	Double Splice both sides
brm3	515	8001U-70	Orange	Double Splice both sides
brm4	577	8001U-70	Orange	Double Splice both sides
brs1	865	8001U-130	Orange	Double Splice both sides
brs2	2543	8001U-90	Orange	Double Splice both sides

EN Instructions on Measuring the Total Line Length


- The measurement of the total line lengths is done including risers and up to the lower sail.
- Lines should always be measured under a load of 5daN.
- The measurement is performed with riser and Controlhandle connected to the same length.
- The pin diameter for the measurement is 8mm.
- The brake line is measured incl. controlhandle to the lower sail (incl. gathering system).

DE Anweisung zur Vermessung der Gesamtleinenlänge

- Die Vermessung der Gesamtleinenlängen erfolgt inklusive Tragegurte bis zum Untersegel.
- Leinen werden grundsätzlich unter einer Last von 5daN gemessen.
- Die Vermessung erfolgt mit eingehängtem Tragegurt und Kontrollgriff auf selber Länge.
- Der Bolzendurchmesser für die Vermessung beträgt 8mm.
- Die Bremsleine wird inkl. Kontrollgriff bis zum Untersegel (inkl. Raffsystem) gemessen.

FR Instructions pour les Mesures de Longueur des Lignes

- La mesure des longueurs s'effectue depuis le bas des élévateurs jusqu'à l'intrados.
- Les lignes doivent être mesurées sous une charge de 5 daN.
- Les mesures sont réalisées en plaçant le point d'accroche des élévateurs et la commande au même niveau, afin que les maillons soient tous à la même hauteur.
- Le diamètre du tube d'accroche utilisé pour les mesures est de 8 mm.
- Les freins sont mesurés depuis la commande jusqu'à l'intrados.

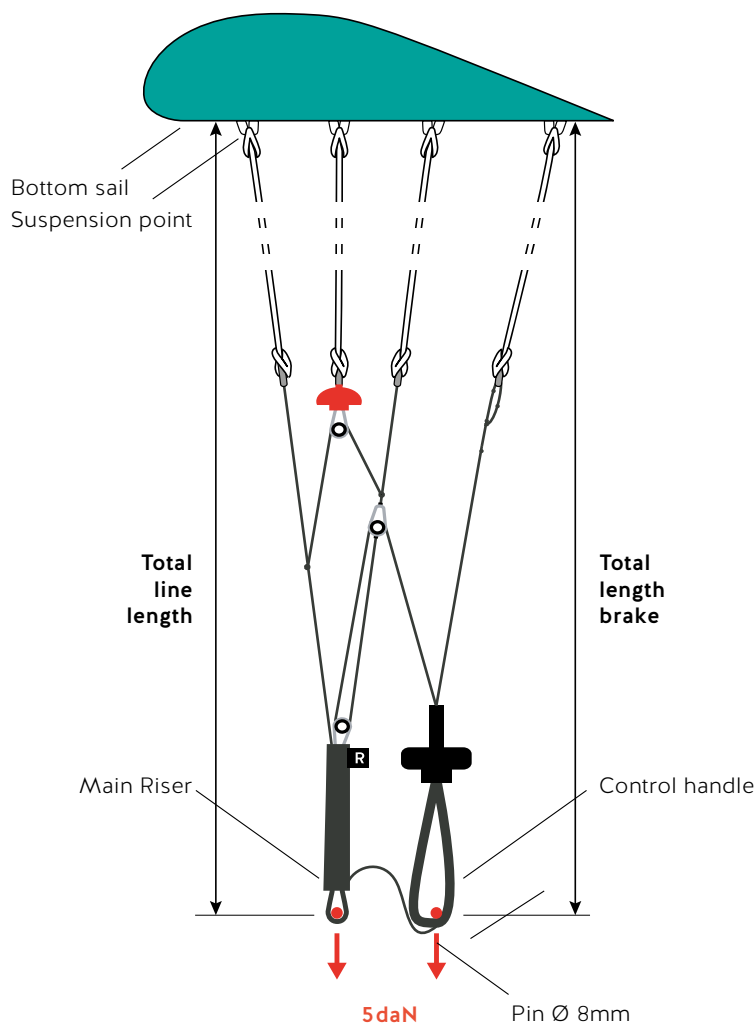

A	LENGTH (MM)
a1	4841
a2	4729
a3	4661
a4	4643
a5	4550
a6	4424
a7	4343
a8	4324
a9	4187
a10	4148
a11	4136
a12	4171

B	LENGTH (MM)
b1	4820
b2	4709
b3	4642
b4	4627
b5	4530
b6	4409
b7	4338
b8	4326
b9	4206
b10	4178
b11	4170
b12	4196

C	LENGTH (MM)
c1	4905
c2	4792
c3	4722
c4	4702
c5	4604
c6	4481
c7	4403
c8	4387
c9	4265
c10	4233
c11	4220
c12	4234

BRAKE	LENGTH (MM)
br1	5275
br2	5132
br3	5056
br4	4963
br5	4838
br6	4752
br7	4721
br8	4565
br9	4466
br10	4443
br11	4476